


0.00" 0.25" 0.50" 0.75" 1.00" 1.25" 1.50" 1.75" 2.00"

2

PROPRIETARY STATEMENT: ULTRAVOLT INC.
CONFIDENTIAL DRAWING

B PART NUMBER: OL-013 REV D SH 1

REVISIONS				
LTR	DESCRIPTION	BY	DATE	APPD
A	NEW RELEASE	D.S.	2/3/00	J.M.
B	ADDED DWG NO. PER ECO #2137	D.S.	01/12/05	J.M.
C	REVISED PER ECO # 2743	SRO	3/1/02	D.P.
C1	REVISED PER ECO # UV3134	SG	12/02/03	SRO
D	REVISED PER ECO # UV3247	RG	11/12/05	S.O.

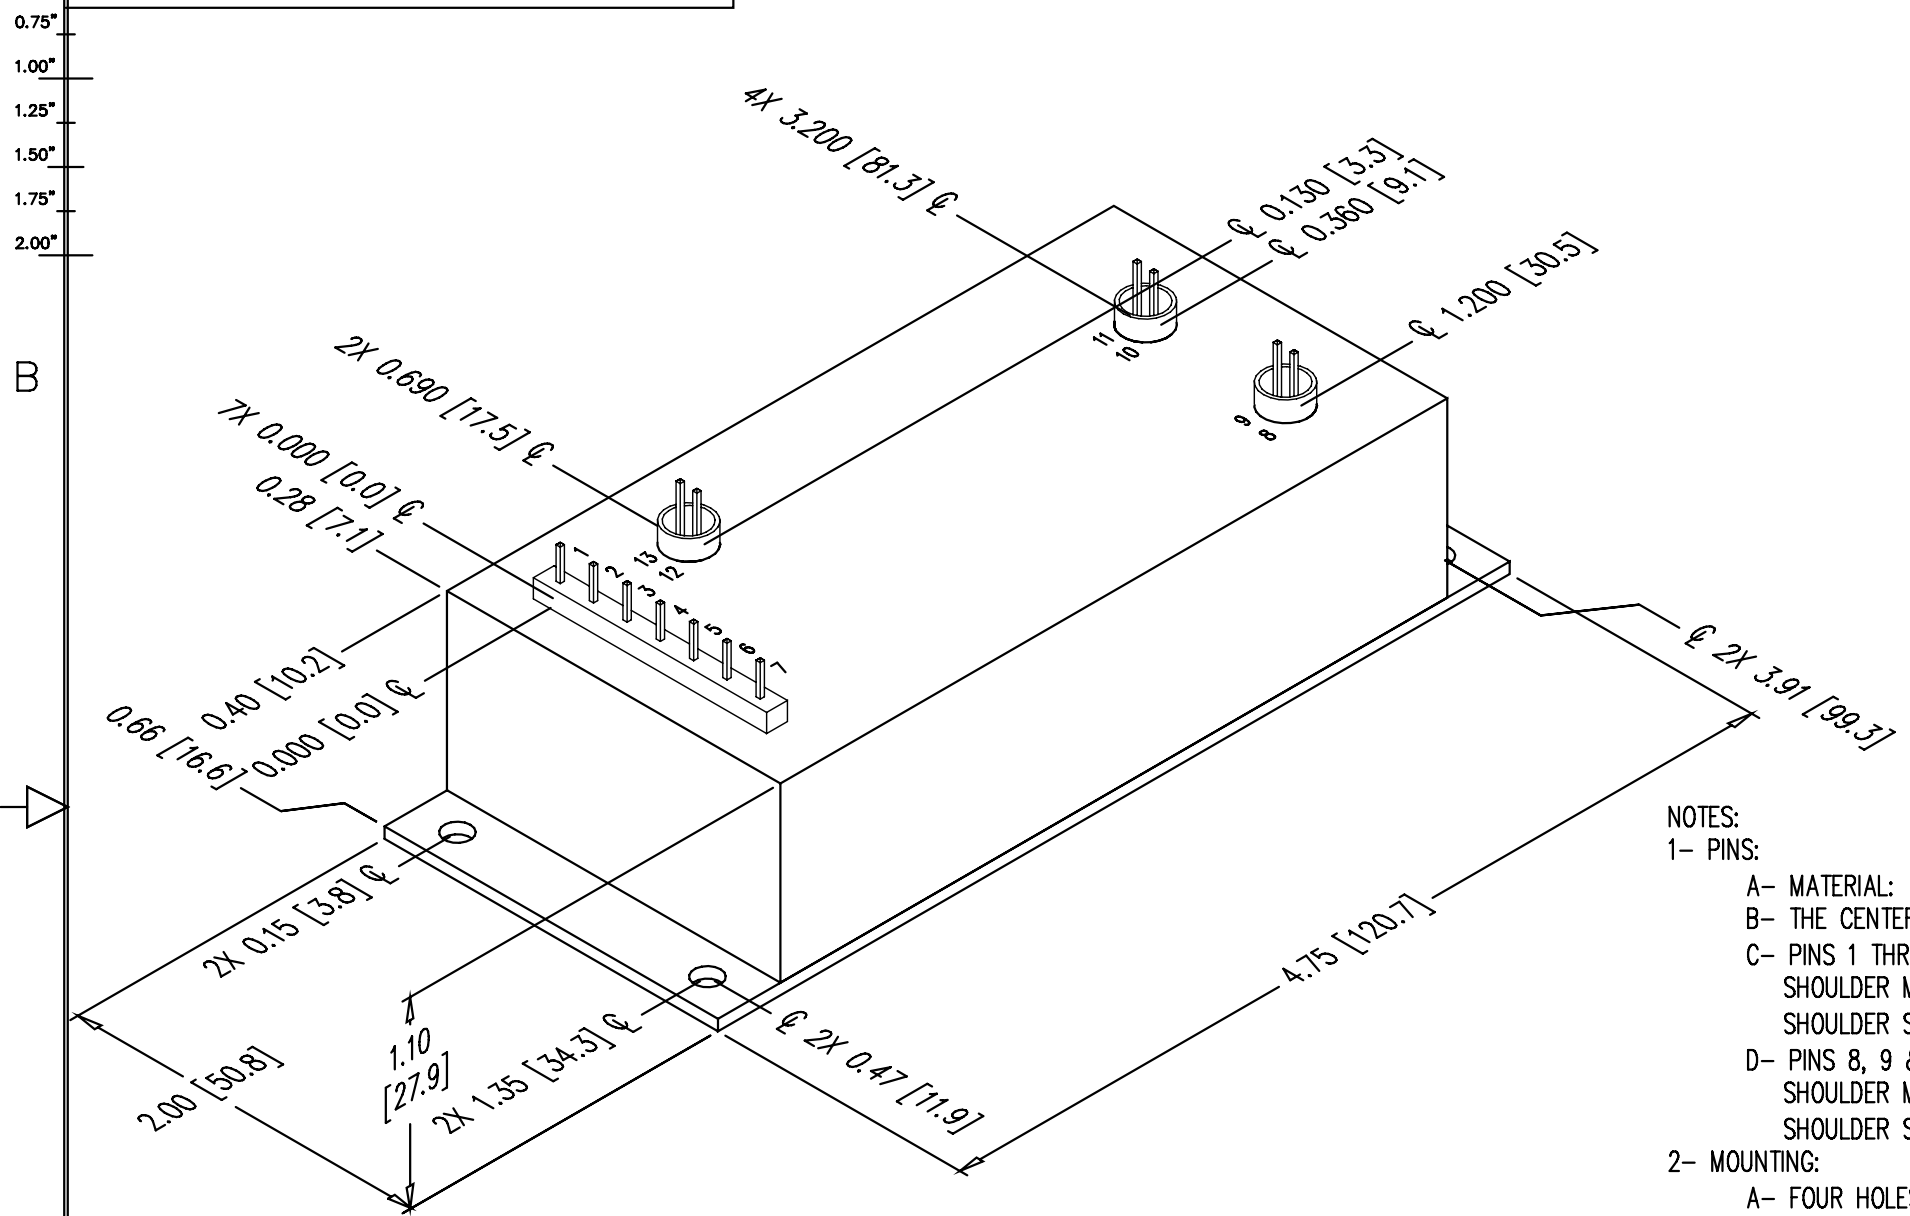

NOTES:
 1- PINS:
 A- MATERIAL: GOLD PLATED 0.025 [0.63] SQ.
 B- THE CENTER OF THE PINS AND MOUNTING HOLES ARE LOCATED FROM THE CENTER OF PIN 1.
 C- PINS 1 THRU 7 SPACING 0.200 [5.08] ON CENTER, HEIGHT FROM COVER 0.280 [7.11] MIN. SHOULDER MATERIAL: DIALLYL PHTHALATE. 94V0. SHOULDER SIZE 0.140 [3.5] X 1.400 [35.56] X 0.060 [1.5] MIN HEIGHT FROM COVER.
 D- PINS 8, 9 & 10 11 & 12,13 SPACING 0.100 [2.54] ON CENTER, HEIGHT FROM COVER 0.220 [5.60] MIN. SHOULDER MATERIAL: TEFLON. SHOULDER SIZE: OD 0.27 [6.86] X ID 0.23 [5.71] X 0.200 [5.0] MIN HEIGHT FROM COVER.
 2- MOUNTING:
 A- FOUR HOLES Ø0.156 [Ø3.96] THROUGH A 0.062 [1.57] THK PLATE.
 3- CONSTRUCTION:
 EPOXY FILLED ALUMINUM BOX CHEM FILM PER MIL-C-5541 CLASS 1A.
 4- TOLERANCE:
 A- OVERALL +/-0.050 [1.27]
 B- PIN TO PIN +/-0.015 [0.38]

A

A

UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES TOLERANCES ARE:			CUSTOMER	
2 PL DEC ± .02	FRACT ± 1/64		DRAWN	S. Orban
3 PL DEC ± .010	ANGLES ± 2°		DATE	02/04/02
			CHKD	D. Parant
			MFG	N/A
			MFG ENGR	N/A
			PROCESS	N/A
			QA	N/A
			CHIEF ENG	N/A
			OFF: OL-013_revD_A-C_AUX_CAN.dwg	
HOLE DIA	TOLERANCES			
.0135 THRU .125	+ .004 - .004			
.126 THRU .250	+ .005 - .005			
.251 THRU .500	+ .006 - .006			
.501 THRU .750	+ .008 - .008			
.751 THRU 1.000	+ .010 - .010			
1.001 THRU 2.000	+ .012 - .012			
DASH NUMBER	NEXT ASSY	USED ON		
APPLICATION				

ULTRAVOLT, INC.
 1800 OCEAN AVE. FRNT, RONKONKOMA, N.Y. 11779
 1-831-471-4444

OUTLINE
 DUAL AUX
 METAL CASE

PART NUMBER: OL-013 REV D

SCALE NONE DO NOT SCALE THIS DRAWING SHEET 1 OF 1

2

1