


0.00" 0.25" 0.50" 0.75" 1.00" 1.25" 1.50" 1.75" 2.00"

PROPRIETARY STATEMENT: ULTRAVOLT INC.  
CONFIDENTIAL DRAWING

REVISIONS				
LTR	DESCRIPTION	BY	DATE	APPD
1	NEW RELEASE	J.T.	4/5/01	J.M.
A	REVISED PER ECO #2743	SRO	3/1/02	D.P.
B	REVISED PER ECO #UN3136	SG	11/26/03	SRO
C	REVISED PER ECO #UV3245	RG	10/11/05	S.O.

B  
A

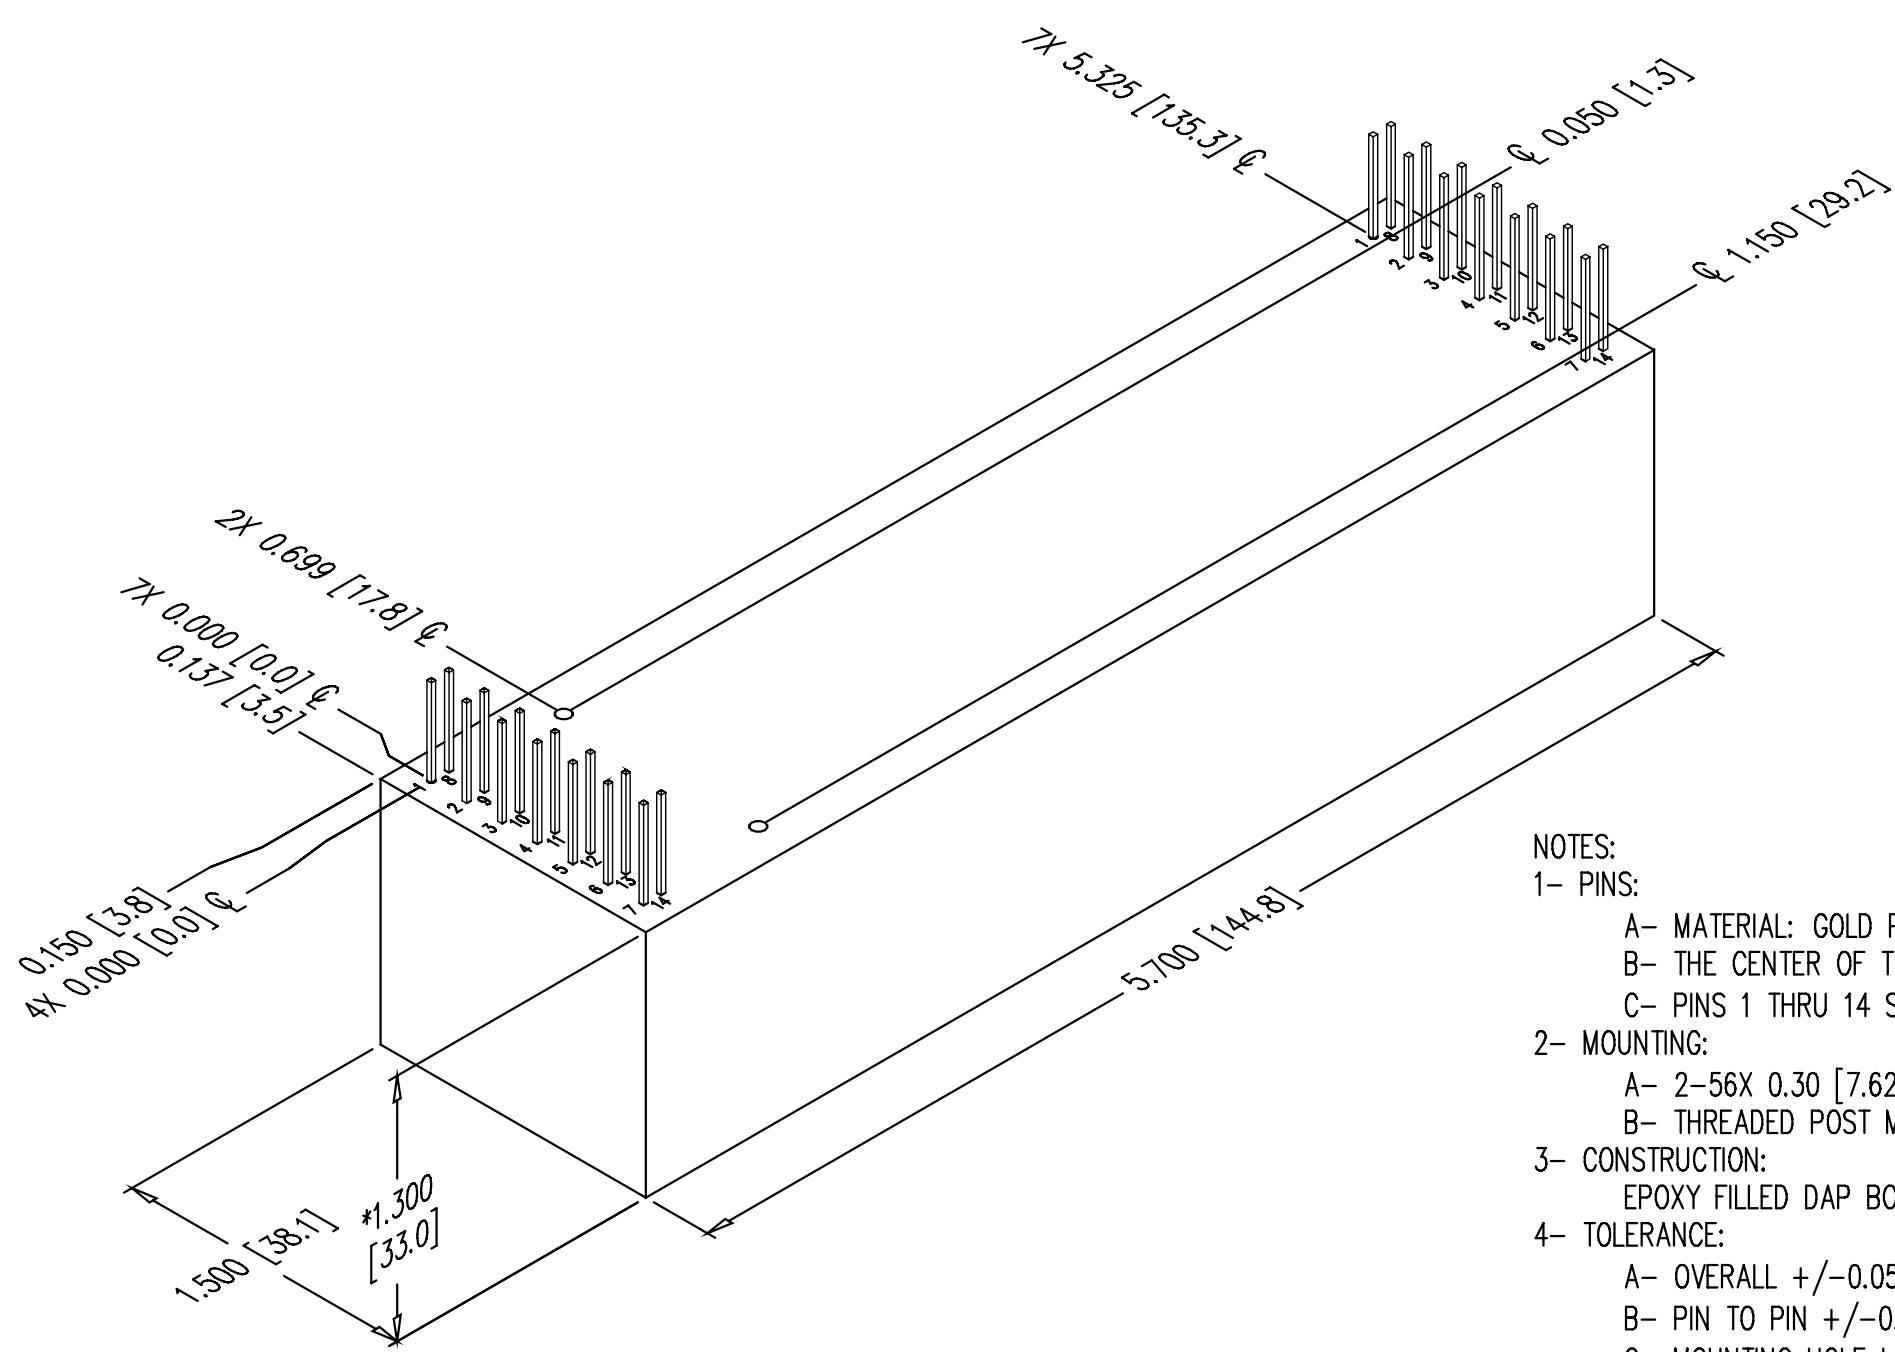

NOTES:  
 1- PINS:  
 A- MATERIAL: GOLD PLATED 0.025 [0.64] SQ.  
 B- THE CENTER OF THE PINS AND MOUNTING HOLES ARE LOCATED FROM CENTER OF PIN 1.  
 C- PINS 1 THRU 14 SPACING 0.100 [2.54] X 0.200 [5.08] ON CENTER, HEIGHT FROM COVER 0.300 [7.6] MIN  
 2- MOUNTING:  
 A- 2-56X 0.30 [7.62] DP UNC-2B THD 2 PLACES.  
 B- THREADED POST MAY NOT BE FLUSH TO COVER.  
 3- CONSTRUCTION:  
 EPOXY FILLED DAP BOX CERTIFIED TO ASTM-D-5948  
 4- TOLERANCE:  
 A- OVERALL +/-0.050 [1.27].  
 B- PIN TO PIN +/-0.015 [0.38].  
 C- MOUNTING HOLE LOCATION +/- 0.025 [0.64].  
 \*5- 24 WATT VERSIONS ARE AN ADDITIONAL 0.062 [1.57] IN HEIGHT.  
 \*6- -M EQUIPPED UNITS ARE AN ADDITIONAL 0.030 [0.76] IN HEIGHT.



UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES TOLERANCES ARE: 2 PL DEC ± .02 FRACT ± 1/64 3 PL DEC ± .010 ANGLES ± 2°			CUSTOMER		<b>ULTRAVOLT, INC.</b> 1800 OCEAN AVE. FRNT, RONKONKOMA, N.Y. 11779 1-631-471-4444
HOLE DIA TOLERANCES			DRAWN <i>S. Orban</i> DATE 02/04/02	CHKD <i>D. Parant</i> 3/20/02	
.0135 THRU .125 +.004 -0.004			MFG <i>N/A</i>	MFG ENGR <i>N/A</i>	OUTLINE 15 FL - RB SERIES
.126 THRU .250 +.005 -0.005			PROCESS <i>N/A</i>	QA <i>N/A</i>	
.251 THRU .500 +.006 -0.006			CHIEF ENG <i>N/A</i>	CFN: OL-034_revC_15FL_RB.dwg	PART NUMBER: OL-034 REV C
.501 THRU .750 +.008 -0.008			SCALE NONE		DO NOT SCALE THIS DRAWING
.751 THRU 1.000 +.010 -0.010			SHEET 1 OF 1		
1.001 THRU 2.000 +.012 -0.012					