
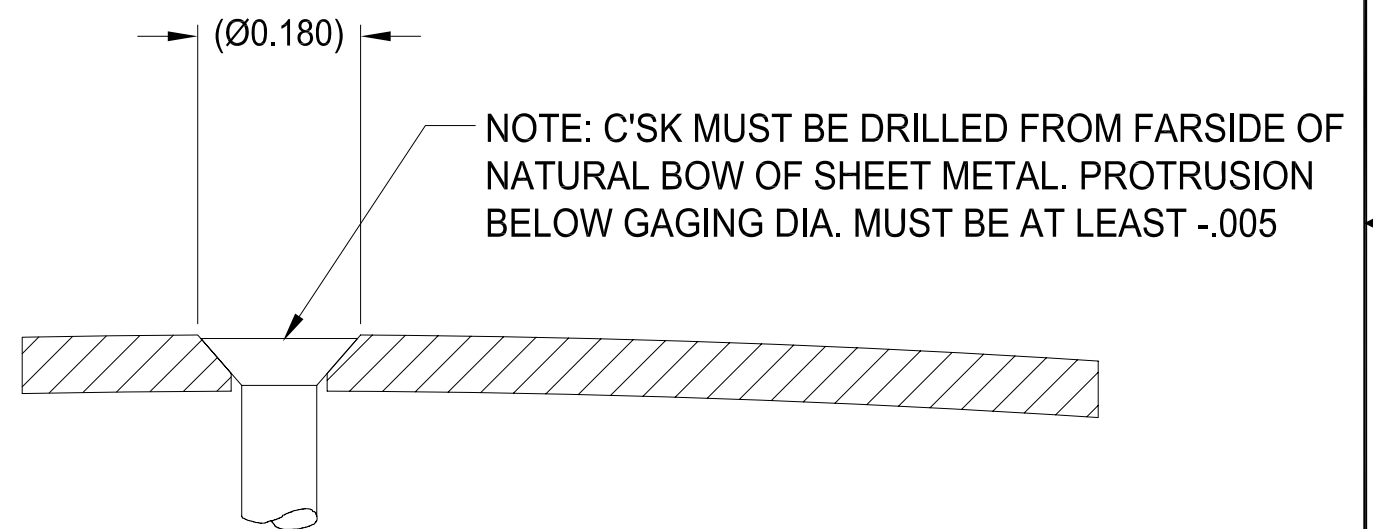


PROPRIETARY STATEMENT: ULTRAVOLT INC.
CONFIDENTIAL DRAWING

| REVISIONS | | | | |
|-----------|---------------------------|------|----------|------|
| LTR | DESCRIPTION | BY | DATE | APPD |
| A | NEW RELEASE | D.S. | 2/1/95 | J.M. |
| B | EXTENSIVELY REVISED | D.S. | 3/7/95 | J.M. |
| C | REVISED PER ECO # TEMP 61 | D.S. | 10/4/95 | J.M. |
| D | REVISED PER ECO # 1688 | D.S. | 2/18/99 | J.M. |
| E | REVISED PER ECO # UV3094 | SRO | 8/14/03 | D.P. |
| E1 | REVISED PER EC-00510-UV | JC | 11/15/07 | SRO |

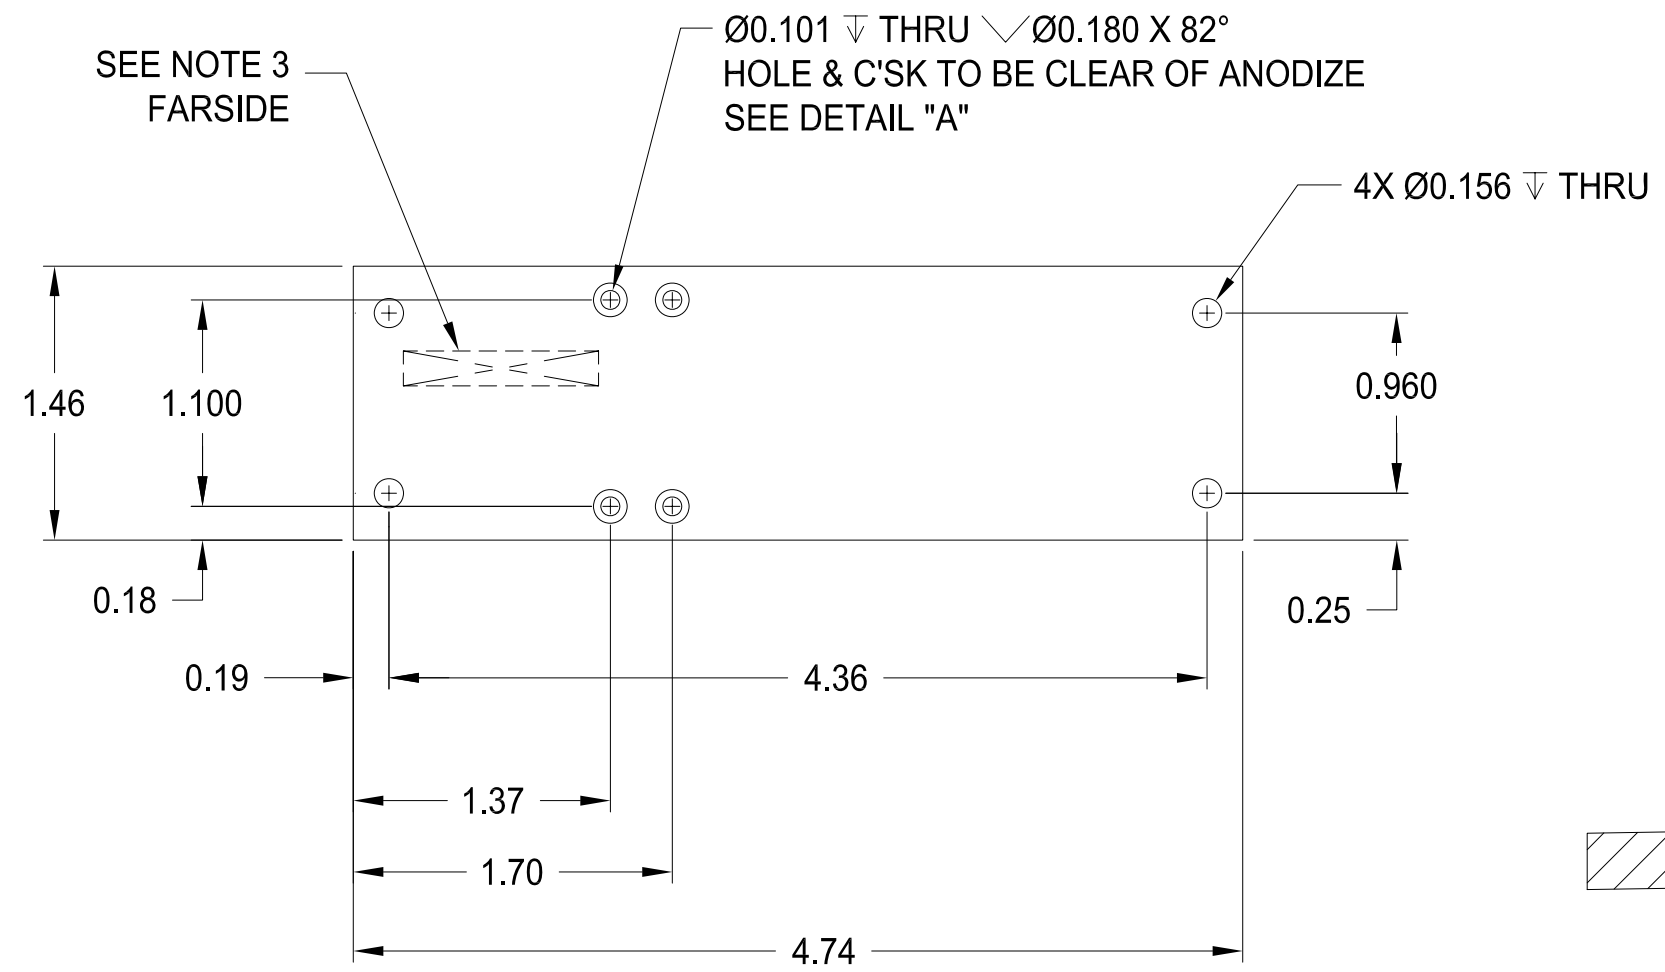

DETAIL 'A'

- NOTES:
- 1- MATERIAL: 0.062 THK ALUM ALLOY 5052-H32 PER QQ-A-250/8.
 - 2- FINISH: DARK BLACK MATTE ANODIZE PER MIL-A-8625, TYPE II, CLASS 2.
 - 3- MARK PART NUMBER AND REVISION. STAMP OR USE A NON-CONDUCTIVE INDELIBLE INK, (FREE OF CARBON) CONTRASTING COLOR, OR STAMP 0.09 - 0.125 HIGH CHARACTERS LOCATE APPROXIMATELY AS SHOWN, FARSIDE. ie. XX-XXX_revX
 - 4- REMOVE ALL BURRS AND SHARP EDGES.

| UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES TOLERANCES ARE: | | CUSTOMER | |
|--------------------------------------------------------------------|--------------|-----------|------------------|
| 2 PL DEC ± .02 | FRACT ± 1/64 | DRAWN | D.S. |
| 3 PL DEC ± .010 | ANGLES ± 2° | CHKD | F.G. |
| | | MFG | N/A |
| | | MFG ENGR | J.S.O. |
| | | PROCESS | N/A |
| | | QA | N/A |
| | | CHIEF ENG | J.M. |
| | | CFN: | HS-101_revE1.dwg |

| DASH NUMBER | NEXT ASSY | USED ON |
|-------------|-----------|---------|
| | | |
| APPLICATION | | |

ULTRAVOLT, INC.
1800 OCEAN AVE. FRNT, RONKONKOMA, N.Y. 11779
1-631-471-4444

HEAT SINK PLATE
"A" & "10A" SERIES - "E" OPTION

B PART NUMBER: HS-101 REV E1

SCALE NONE DO NOT SCALE THIS DRAWING SHEET 1 OF 1